



**MEMBRANE ELEMENT**


**PMBW-4040/34**  
**Low Pressure Drop**

**SPECIFICATIONS AND PRODUCT DESCRIPTION**

Configuration:	Spiral Wound
Membrane Polymer:	Polyamide Thin-Film Composite
Active Area:	80 ft <sup>2</sup> (7.4 m <sup>2</sup> )
Feed Spacer Thickness:	34 mil (0.864 mm)
Permeate Flow:	2,400 gpd (9.1 m <sup>3</sup> /d)
Stabilized Salt Rejection (Minimum):	99.5%

The stated performance is based on the following conditions:

2,000 ppm NaCl  
 225 psig (1.55 MPa) Applied Pressure  
 77°F (25°C) Operating Temperature  
 15% Permeate Recovery  
 pH 8.0

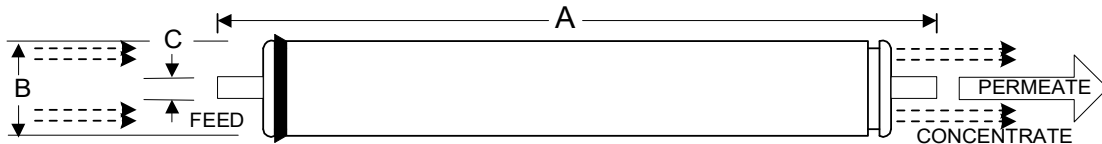

A, inches (mm)	B, inches (mm)	C, inches (mm)	Weight, lbs (Kg)
40.0 (1,016)	3.95 (100.3)	0.75 (19)	8 (3.6)

**OPERATING DATA**

Maximum Applied Pressure:	600 psig (4.14 MPa)
Free Chlorine Tolerance:	< 0.1 ppm
Maximum Operating Temperature:	113°F (45°C)
Continuous pH Range (Cleaning):	2 – 11 (1 – 13)
Maximum Feedwater Turbidity:	1.0 NTU
Maximum Feedwater SDI <sub>15</sub> :	5.0
Maximum Pressure Drop for Each Element:	15 psig (0.10 MPa)
Maximum Feed Flow:	16 gpm (3.6 m <sup>3</sup> /h)
Minimum Ratio of Concentrate to Permeate Flow for any Element:	5:1

**NOTICE:** Permeate flow for individual membrane elements may vary by ±15% from the nominal specified value. Elements are supplied with a brine seal, interconnector, and O-rings in sealed polyethylene packaging. Use only glycerin or silicone-based lubricants for seals and O-rings. Static permeate back pressure must be always avoided.

All information is provided in good faith without warranty of any kind, express or implied. Persalt assumes no liability for results obtained or damages arising from product use. The user is responsible for determining the suitability of the product for the intended application. Specifications are subject to change without notice.