



MEMBRANE ELEMENT

PMES1-400LF


L⁴E™ Technology (Low Fouling • Low Pressure Drop • Low Energy • Low Salt Passage)

SPECIFICATIONS AND PRODUCT DESCRIPTION

Configuration:	Spiral Wound
Membrane Polymer:	Polyamide Thin-Film Composite
Active Area:	400 ft ² (37.2 m ²)
Feed Spacer Thickness:	34 mil (0.864 mm)
Permeate Flow:	12,000 gpd
Stabilized Salt Rejection:	99.4%

The stated performance is based on the following conditions:

1,500 ppm NaCl
 150 psig (1.05 MPa) Applied Pressure
 77°F (25°C) Operating Temperature
 15% Permeate Recovery
 pH 6.5 – 7.5

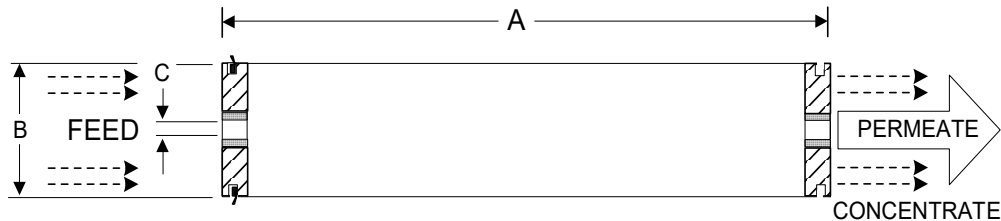

A, inches (mm)	B, inches (mm)	C, inches (mm)	Weight, lbs (Kg)
40.0 (1016)	7.9 (201)	1.125 (28.6)	33 (15)

OPERATING DATA

Maximum Applied Pressure:	600 psig (4.14 MPa)
Free Chlorine Tolerance:	< 0.1 ppm
Maximum Operating Temperature:	113°F (45°C)
Continuous pH Range (Cleaning):	2 – 11 (2 – 12)
Maximum Feedwater Turbidity:	1.0 NTU
Maximum Feedwater SDI ₁₅ :	5.0
Maximum Pressure Drop for Each Element:	15 psig (0.10 MPa)
Maximum Feed Flow:	75 gpm (17.0 m ³ /h)
Minimum Ratio of Concentrate to Permeate Flow for any Element:	5:1

NOTICE: Permeate flow for individual membrane elements may vary by ±15% from the nominal specified value. Elements are supplied with a brine seal, interconnector, and O-rings in sealed polyethylene packaging. Use only glycerin or silicone-based lubricants for seals and O-rings. Static permeate back pressure must be always avoided.

All information is provided in good faith without warranty of any kind, express or implied. Persalt assumes no liability for results obtained or damages arising from product use. The user is responsible for determining the suitability of the product for the intended application. Specifications are subject to change without notice.